


5V-Crimp Panel


Product Data



5V-CRIMP PANEL PROFILE

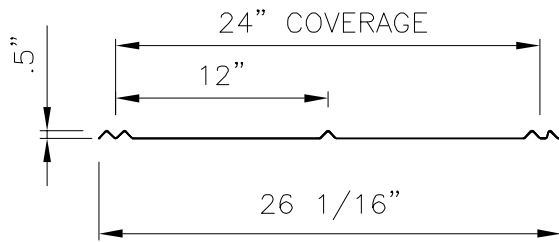


5V-CRIMP PANEL SEAM



FASTENER PATTERN
(@ Eaves, Ridges & Endlaps)



FASTENER PATTERN
(@ Intermediate Spacings)



FOAM INSIDE CLOSURE



FOAM OUTSIDE CLOSURE

Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood

Material

Standard - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

Manufacturing

Roll formed in factory. (Ashburn Plant Only)

Finishes

Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing *

Uplift: UL 580 Class 90
Impact Testing: UL 2218 Class 4
Fire Resistance: UL 263 & UL 790 Class A
Florida Product Approval: FL 1832.1
Miami Dade Approval: NOA # 13-0430.05
Texas Windstorm: RC-13
Testing and Approvals are product specific. Please inquire for details.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.