


Panel / Trim /Accessories



MET-TILE

Corporate Office • 1500 Hamilton Rd. • Bossier City, LA 71111 • www.mcelroymetal.com




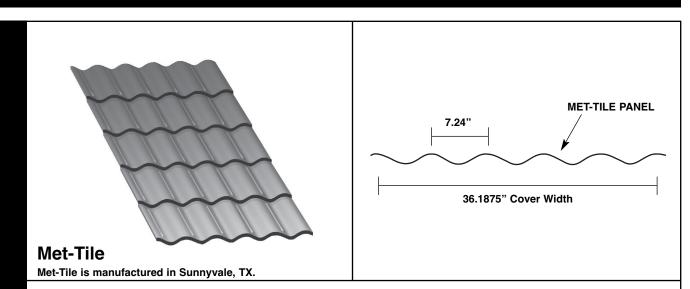


Notes:

- Standard Panels:
 - 26 gauge Galvalume® substrate embossed with Kynar 500® coating.
- Minimum Slope:
 - Minimum slope with tape is 1 1/2:12 and without tape is 3:12.
- Standard minimum length is 2' and standard maximum length is 20'.
- Met-Tile panels are to be used as roof panels only.
- Met-Tile must be installed over solid deck.
- Standard trim is 26 gauge.
- Oil canning is inherent in all metal panels and is not cause for panel rejection.
- Contact a McElroy representative for specific pricing, lead times and special colors or gauges that may not be on a McElroy Metal color chart.
- Contents of this manual are subject to change without notice. To confirm this manual is the most current copy, visit www.mcelroymetal.com.



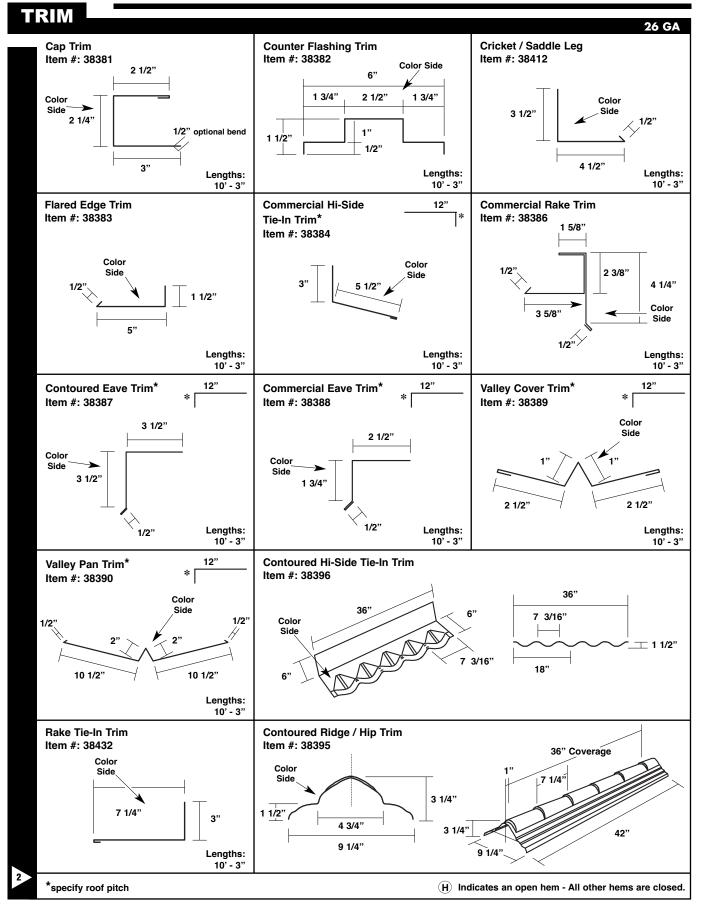




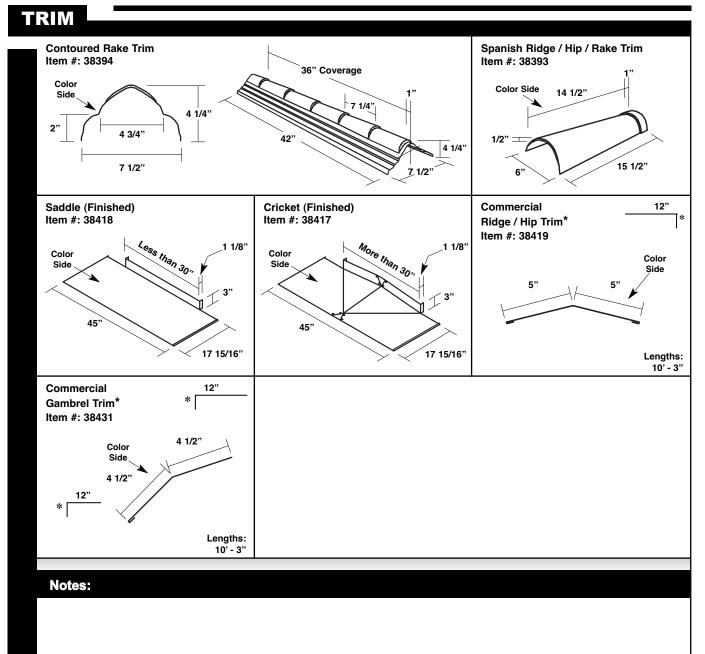

3




ACCESSORIES

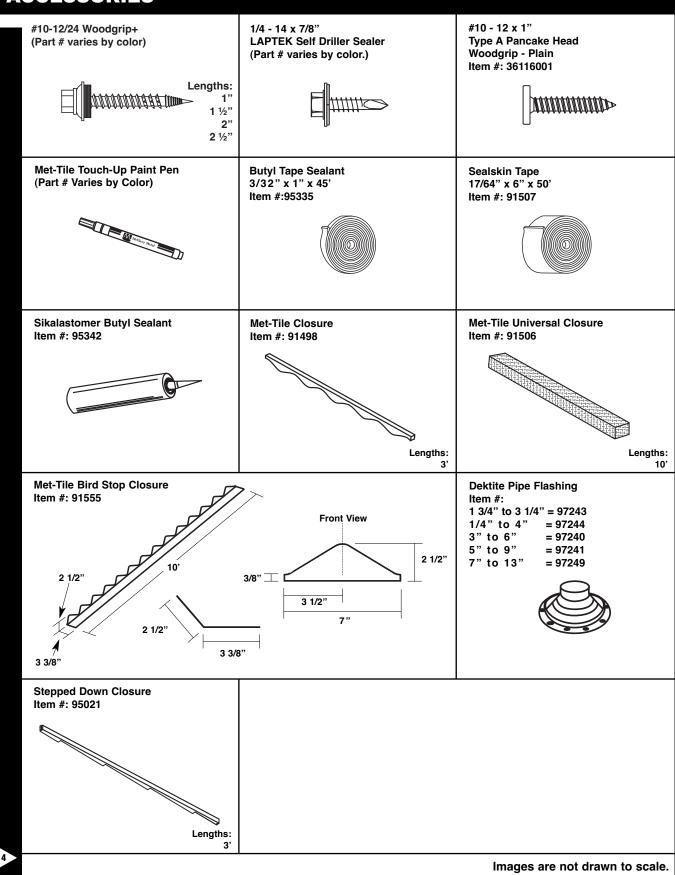



☆ MANUFACTURING LOCATIONS ● SERVICE CENTERS ★ MANUFACTURING AND SERVICE CENTER

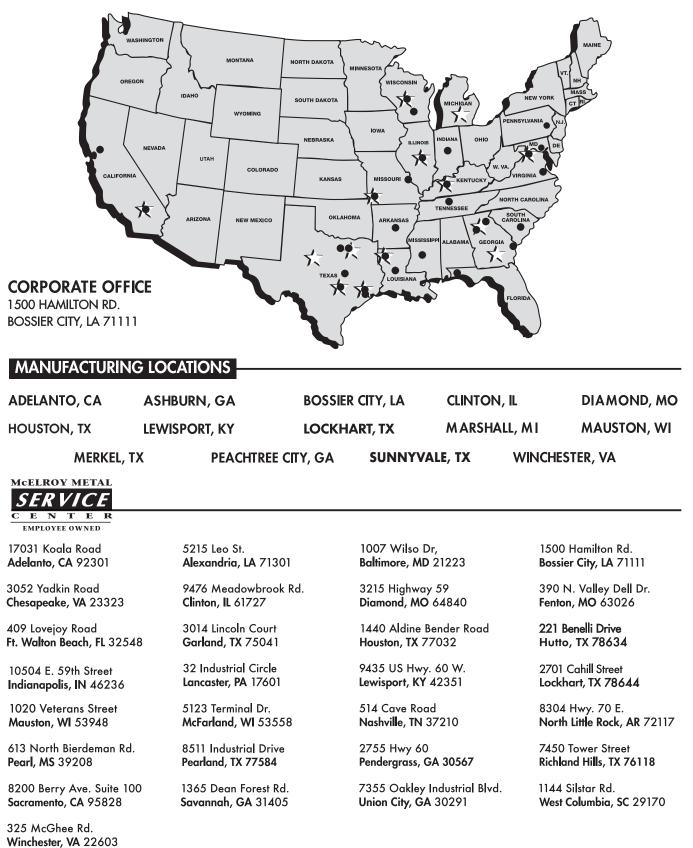

Website: www.mcelroymetal.com · E-mail: info@mcelroymetal.com