



Marquee-Lok Soffit Panel


Product Data

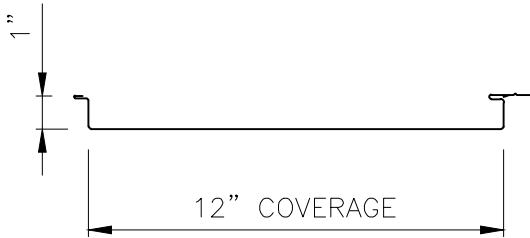

MARQUEE-LOK PROFILE
(Flat Pan Standard)

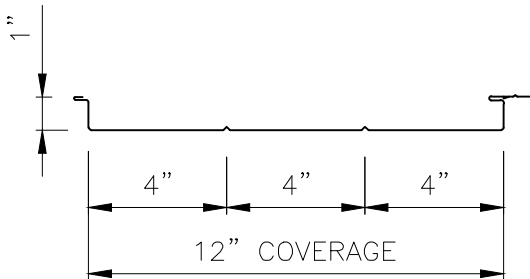

MARQUEE-LOK PROFILE
(Double Pencil Rib Optional)

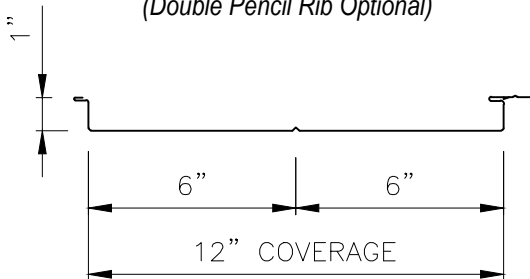

MARQUEE-LOK PROFILE
(Single Pencil Rib Optional)

Applications

Concealed fastener soffit/wall panel. Standard panel lengths from:
22 GA. – 3' to 15' (can be cut down to 12")
24 GA. – 3' to 8' (can be cut down to 12")

Substrates

Solid Wood Decking, Hat Section, Mac-Girts, or Wall Girts.

Material

Standard – 24 GA. ASTM A792 (50 ksi steel) AZ55 – Bare
AZ50 – Painted
– 22 GA. ASTM A792 (50 ksi steel) AZ55 – Bare
AZ50 – Painted

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)

Panel Conditions

Non-Vented (Flat Pan or Double Pencil Rib)
Vented (Flat Pan or Single Pencil Rib)

**Ventilation = 8% Net Free Air

Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

Testing *


Uplift: ASTM E1592
Air & Water Infiltration: ASTM E331 & E283
Testing and Approvals are product specific. Please inquire for details.

NOTE:


All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

VENTING NOTE:

Due to venting/perforations, vented Marquee-Lok products must be stored inside. Any moisture cause cause premature rusting.

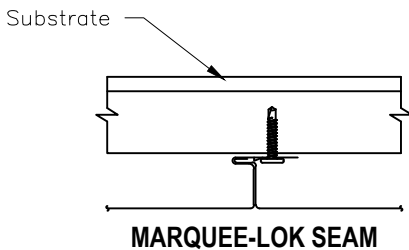


MARQUEE-LOK SEAM

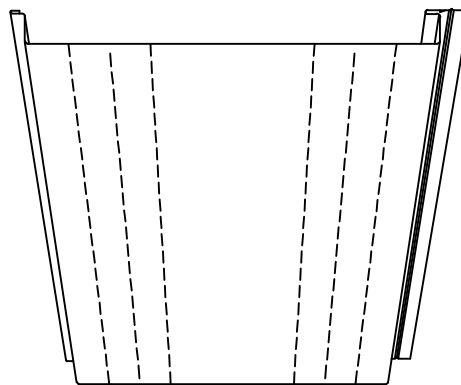

VENTED PANEL
(8% Net Free Air)

(Flat Pan or Single Pencil Rib Only)

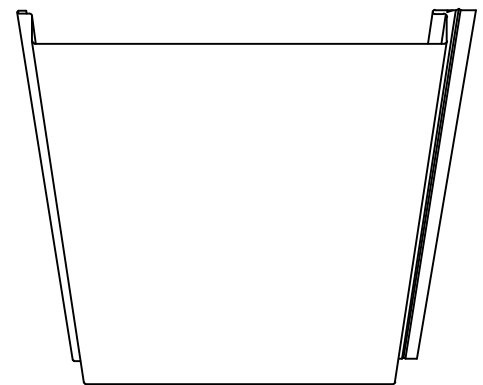

NON-VENTED PANEL

(Flat Pan or Double Pencil Rib Only)