



Mega-Rib Panel

Product Data

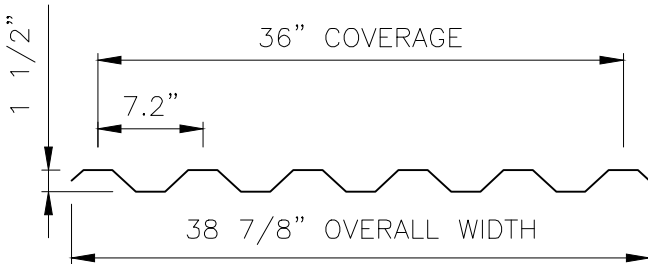

MEGA-RIB PROFILE

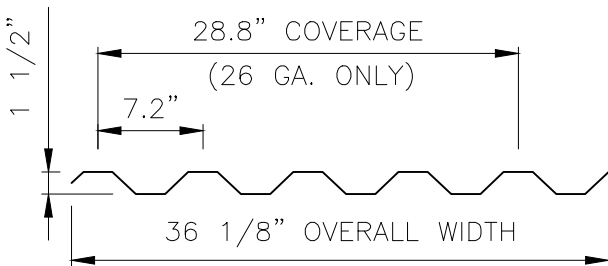

**MEGA-RIB PROFILE
(NARROW PANEL)**

Applications

Exposed fastener wall/roof panel used on slopes down to 1:12. Tape sealant is required on seam (side-laps). Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Solid Wood Decking or Purlins.

Material

- Standard – 24 GA. Steel ASTM A792 (50 ksi) AZ55 – Bare, AZ50 – Painted
- Optional – 22 GA. Steel ASTM A792 (50 ksi) AZ55 – Bare, AZ50 – Painted
- 26 GA. Steel ASTM A792 (80 ksi) (Narrow Coverage)
 - AZ50 – Bare
 - AZ50 – Painted
- 26 GA. Steel ASTM A792 (80 ksi) (Full Coverage)
 - AZ50 – Bare **Adelanto Only**
 - AZ50 – Painted
- 18 GA. and 20 GA. Steel ASTM A792 (50 ksi)
 - AZ50 – Painted (limited availability)

Manufacturing

Roll formed in factory.

Finishes

- Acrylic Coated Galvalume®
- Fluoropolymer (Kynar 500® PVDF resin-based)
- Siliconized Polyester and Polyester

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing *


- Uplift: UL 580 Class 90, ASTM E1592
- Air & Water Infiltration: E1646 and E1680
- Impact Resistance: UL 2218 Class 4
- Fire Resistance: UL 263 & UL 790 Class A
- Florida Product Approval: FL 1832.8 (non-structural)
- FL 1747.6 (structural)

Miami Dade Approval: NOA# 20-1215.10


Testing and Approvals are product specific. Please inquire for details.

NOTE:


All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.



FOAM INSIDE CLOSURE




FOAM OUTSIDE CLOSURE

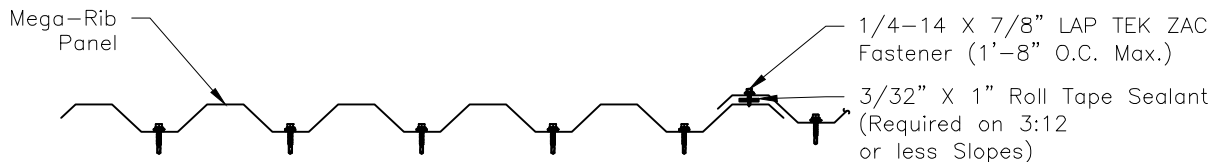

FASTENER PATTERN

(@ Eaves, Ridges & Endlaps)

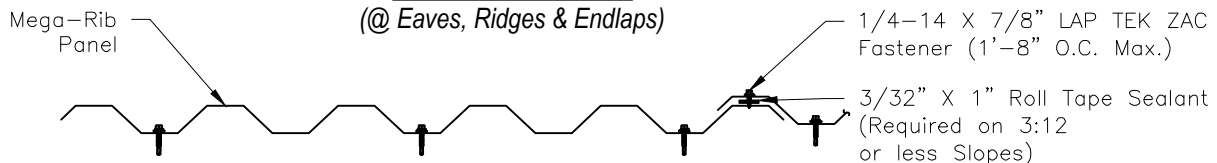

FASTENER PATTERN

(@ Intermediate Purlins)