


## Multi-V Panel


## Product Data



MULTI-V PANEL PROFILE

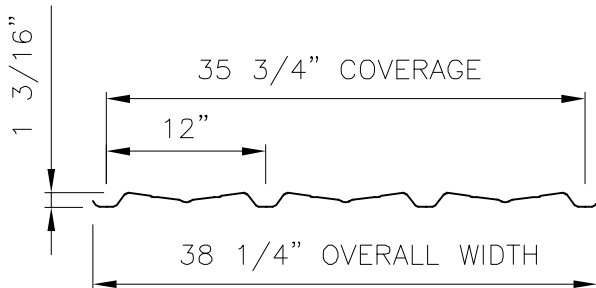

FOAM OUTSIDE CLOSURE




FOAM INSIDE CLOSURE

Multi-V  
Panel



FASTENER PATTERN

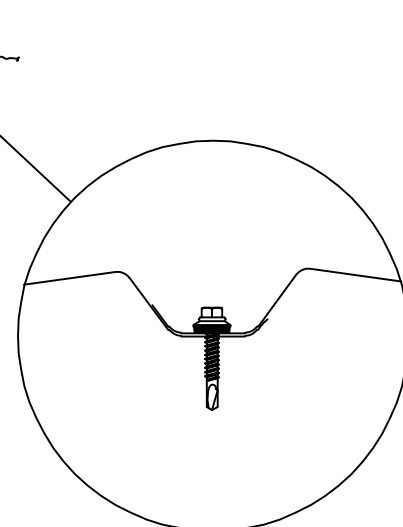

PANEL SIDE LAP

**Applications**

Exposed fastener wall panel. Standard panel lengths up to 50'. Please inquire for longer lengths.

**Substrates**

Plywood or Purlins.

**Material**

Standard - 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare  
 AZ50 - Painted  
 - 26 GA. ASTM A792 (80 ksi steel) AZ55 - Bare  
 AZ50 - Painted  
 Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare  
 AZ50 - Painted

**Manufacturing**

Roll formed in factory.

**Finishes**

Acrylic Coated Galvalume®  
 Fluoropolymer (Kynar 500® PVDF resin-based)  
 Siliconized Polyester and Polyester

**Pan Conditions**

Oil canning is inherent in all metal panels and is not cause for panel rejection.

**NOTE:**

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.