



## Instaloc Standing Seam Panel


## Product Data

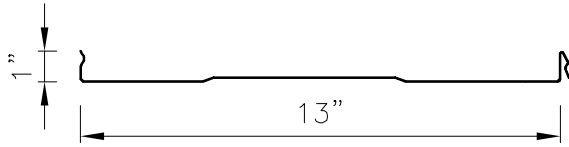


**PLANK PROFILE**

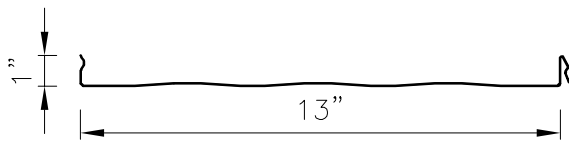

**STRIATIONS PROFILE**

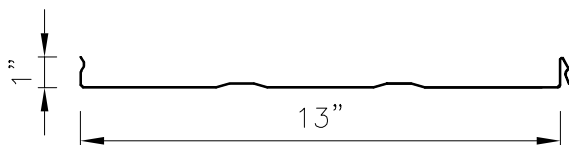

**MINOR RIB PROFILE**

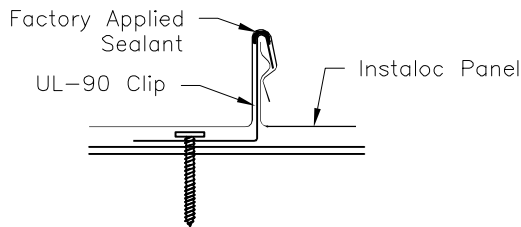

**SEAM ENGAGEMENT**

**Applications**

Non-structural panel used on roof slopes of 3:12 or greater. Continuous lengths up to 80ft.

**Substrates**

Plywood, Metal Deck

**Material**

Standard - 24 GA. ASTM A792 (50 ksi)

Optional - 22 GA. ASTM A792 (50 ksi)

**Finishes**

Acrylic Coated Galvalume®

Fluoropolymer (Kynar 500® PVDF resin-based)

**Pan Conditions**

Plank, Striated, and Minor Ribs

(Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.)

**Manufacturing**

Roll formed in factory.

**Testing/Agency Approvals \***

Uplift: UL 580, UL 1897

Impact Resistance: UL Class 4


Fire Rating: UL Class A

Texas Windstorm: RC-86

\*Testing and Approvals are product specific. Please inquire for details.\*


**NOTE:**

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

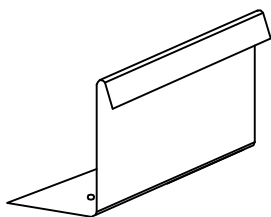


**CLIP**

24 GA. - ASTM A792 (50 ksi)

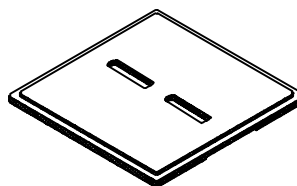

**STACKABLE LEVELING SHIM**

6" x 6" x 1/4" Thick



**BEARING PLATE**

24 GA. - ASTM A792 (50 ksi)