


Marquee II Soffit Panel


Product Data



MARQUEE II PROFILE
(Flat Pan Standard)

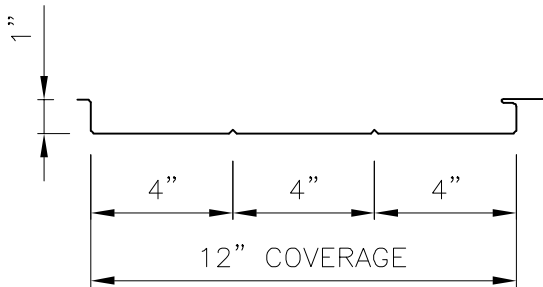

MARQUEE II PROFILE
(Double Pencil Rib Optional)

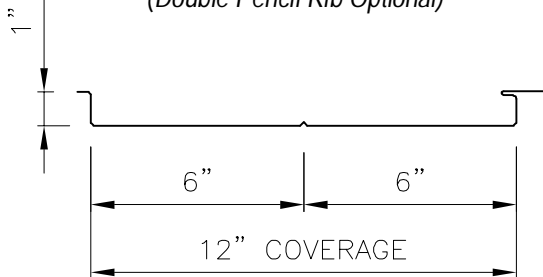

MARQUEE II PROFILE
(Single Pencil Rib Optional)

Applications

Concealed fastener soffit panel. Standard panel lengths from:
 22 GA. - 3' to 15'
 24 GA. - 3' to 8'

Substrates

Plywood, Hat Section or Mac-Girts.

Material

Standard - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
 AZ50 - Painted
 - 22 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
 AZ50 - Painted

Manufacturing

Roll formed in factory. (Adelanto, CA only)

Finishes

Acrylic Coated Galvalume®
 Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Non-Vented: Flat Pan (Standard), Single or Double Pencil Rib (Optional)

Vented: Flat Pan (Standard) or Single Pencil Rib (Optional)


Vented available in 24 GA. only

Ventilation = 2% Net Free Air


Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

NOTE:


All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

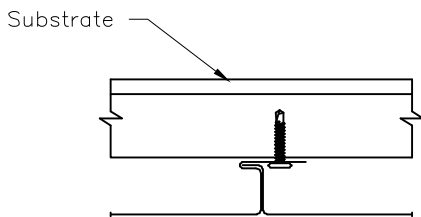

MARQUEE II SEAM

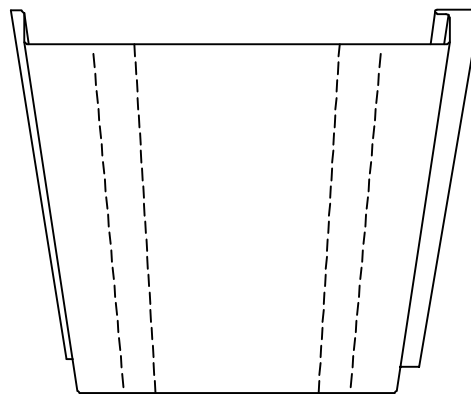

VENTED PANEL
(2% Net Free Air)

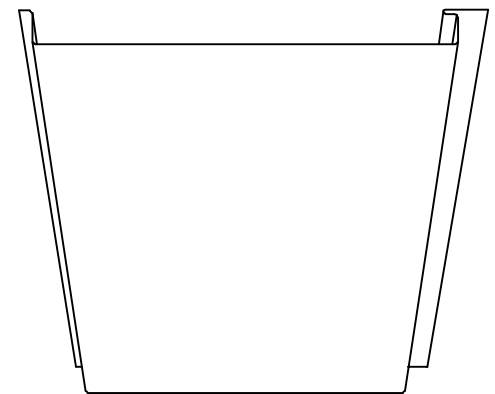

NON-VENTED PANEL