


Marquee-Lok Soffit Panel


Product Data



MARQUEE-LOK PROFILE
(Flat Pan Standard)

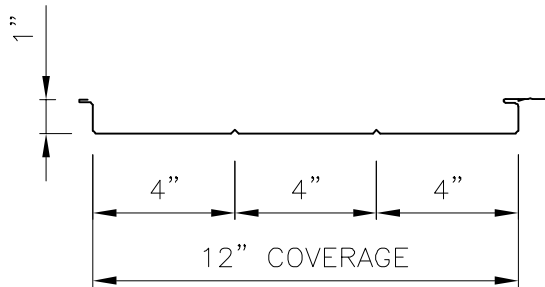

MARQUEE-LOK PROFILE
(Double Pencil Rib Optional)

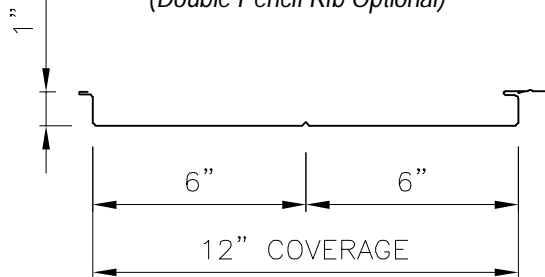

MARQUEE-LOK PROFILE
(Single Pencil Rib Optional)

Applications

Concealed fastener soffit/wall panel. Standard panel lengths from:

- 22 GA. - 4' to 15' (can be cut down to 12")
- 24 GA. - 4' to 8' (can be cut down to 12")

Substrates

Plywood, Hat Section, Mac-Girts, or Wall Girts.

Material

- Standard - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted
- 22 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

Manufacturing

Roll formed in factory.

Finishes

- Acrylic Coated Galvalume®
- Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions


- Flat Pan (Standard) or Pencil Rib (Optional)
- Vented or Non-Vented (Single Pencil Rib Only with Vented Option.)
- Ventilation = 8% Net Free Air
- Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

Testing *


- Uplift: ASTM E1592
- Air & Water Infiltration: ASTM E331 & E283
- *Testing and Approvals are product specific. Please inquire for details.*

NOTE:


All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

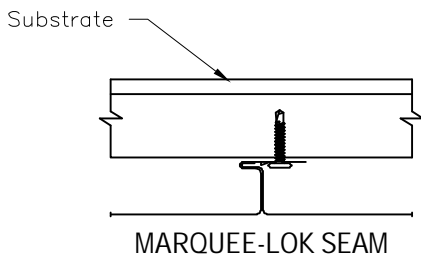

MARQUEE-LOK SEAM

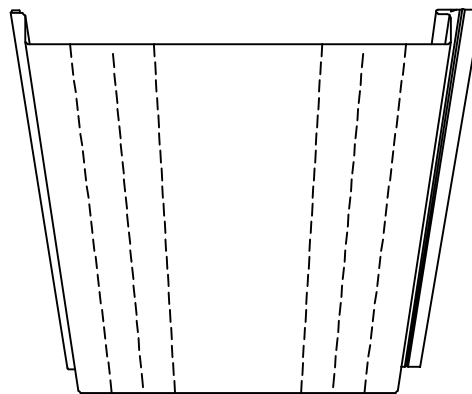

VENTED PANEL
(8% Net Free Air)

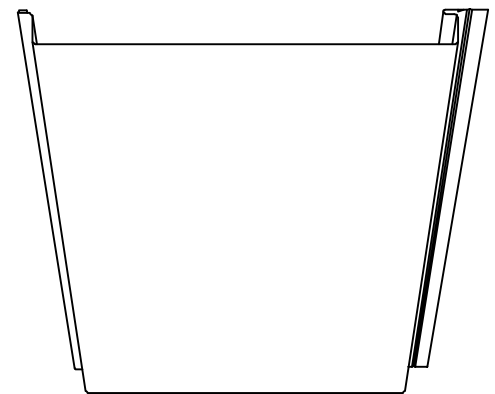

NON-VENTED PANEL