



MSR Panel


Product Data

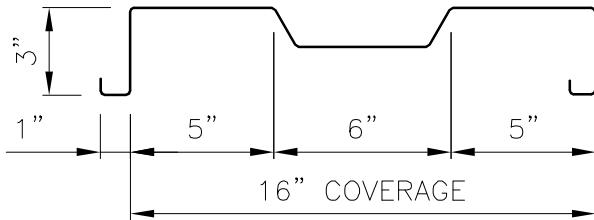


MSR PROFILE

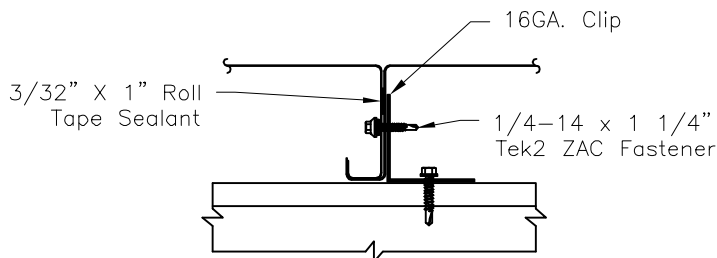

MSR SEAM
(w/ 16 GA. Clip Attachment)

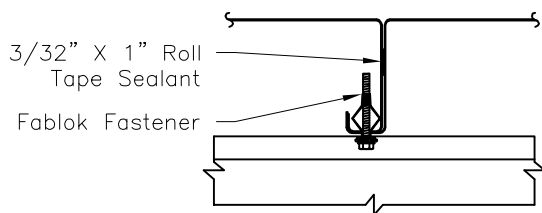


MSR SEAM
(w/ Fablok Fastener Attachment)

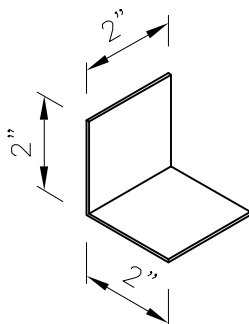


CLIP
16 GA.

GALVANIZED - ASTM A653 (55 ksi)

FOAM OUTSIDE CLOSURE

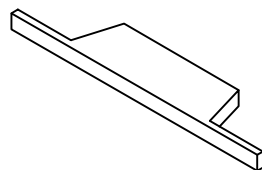

FOAM INSIDE CLOSURE

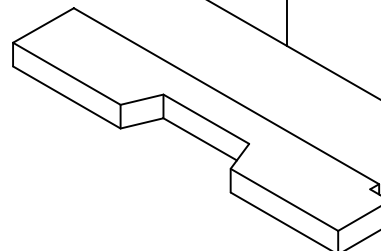

Applications

Concealed fastener wall panel. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood, Hat Section, Mac-Girts, or Wall Girts.

Material

Standard - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted
Optional - 22 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

Manufacturing

Roll formed in factory. (Sunnyvale Plant Only)

Finishes

Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

16" Ribbed
Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing *

Air & Water Infiltration: ASTM E283 & E331
Testing and Approval are product specific. Please inquire for details.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

