



Technical Bulletin

Issue Date : June 7, 2012

No. 99-329-12

MULTI-COR 26 GAUGE





Manufacturer's Recommended Fastening Pattern For Buildings Less than 40' Maximum Roof Height Roof Pitch 7°(1.5:12) to 27°(6.1:12)

| Fastening Pattern for Various Wind Speeds | | | | |
|---|----------------------------|-------------|-------------|-----------------|
| Fastener | Substrate | Wind Speed | Roof Zone 1 | Roof Zone 2 & 3 |
| #9-15 x 1-1/2" Woodgrip | 1/2" Plywood | 90-120 MPH | 36" | 16" |
| | | 120-140 MPH | 31" | 12" |
| | | 140-160 MPH | 23" | 9" |
| #9-15 x 1-1/2" Woodgrip | 1x4 Strips over decking | 90-120 MPH | 36" | 29" |
| | | 120-140 MPH | 36" | 21" |
| | | 140-160 MPH | 36" | 16" |
| #12-14 x 1-1/4" SD #2 | Minimum 16 Ga Steel | 90-120 MPH | 60" | 43" |
| | | 120-140 MPH | 59" | 37" |
| | | 140-160 MPH | 51" | 32" |

Notes:

1. Table is calculated using ASCE 7-05 "Minimum Design Loads for Buildings and Other Structures".
2. Values cannot be utilized for buildings with a peak height greater than 40'.
3. Values cannot be used for buildings with a roof pitch less than 7° or greater than 27°.
4. Fastening pattern is the distance between fasteners running parallel to the panel length.
5. Fastening pattern perpendicular to panel rib is 8" o/c, i.e., one fastener next to each major rib.
6. Calculations use pullout values provided by the screw manufacturer.
7. Factor of safety used for pullout is 2.25 when attaching to steel and 3.00 when attaching to plywood & 1x4 strips. Adjust values accordingly for a different factor of safety.
8. Panel Spacing limited to L/180 deflection for loads acting towards the surface of the panel.
9. See Diagram below for roof zone definition.

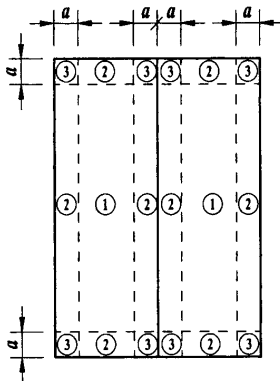

Dimension "a" is defined as 10% of the least horizontal dimension or .4h, whichever is smaller, but not less than 4% of the least horizontal dimension or 3 ft. Where "h" is defined as the mean roof height in feet.

CORPORATE OFFICE
SHREVEPORT, LOUISIANA