


Multi-V Panel


Product Data



MULTI-V PANEL PROFILE

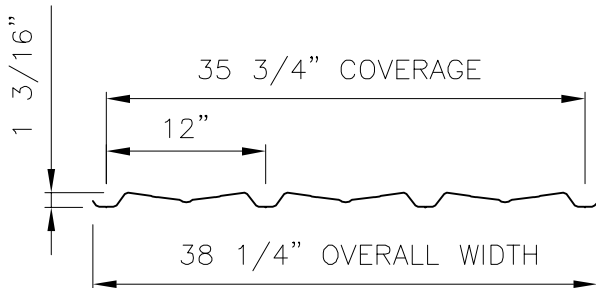

FOAM OUTSIDE CLOSURE




FOAM INSIDE CLOSURE

Multi-V
Panel



FASTENER PATTERN

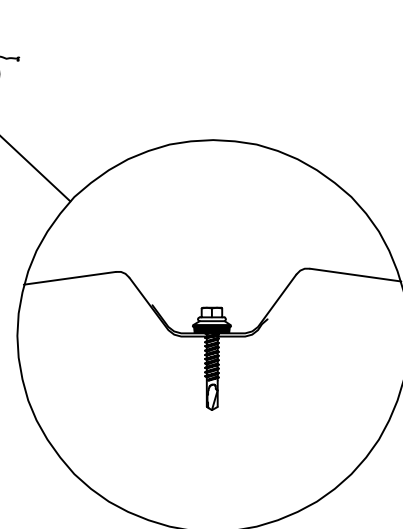

PANEL SIDE LAP

Applications

Exposed fastener wall panel. Standard panel lengths up to 50'. Please inquire for longer lengths.

Substrates

Plywood or Purlins.

Material

Standard - 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
 AZ50 - Painted
 - 26 GA. ASTM A792 (80 ksi steel) AZ55 - Bare
 AZ50 - Painted
 Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
 AZ50 - Painted

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
 Fluoropolymer (Kynar 500® PVDF resin-based)
 Siliconized Polyester and Polyester

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.