



Construction No. 648 TGKX.648 Roof Deck Constructions

[Page Bottom](#)

Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Certified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered Certified.

Roof Deck Constructions


[See General Information for Roof Deck Constructions](#)

Construction No. 648

April 08, 2013

Uplift — Class 90

Fire Classified

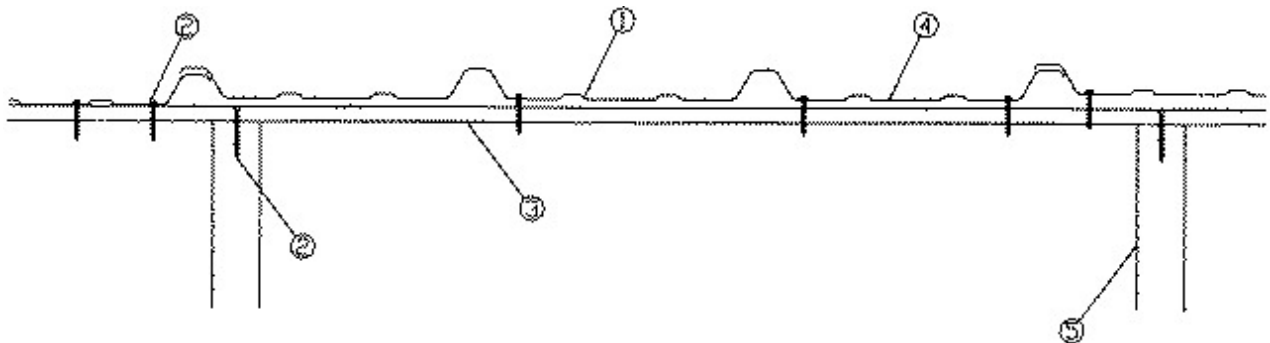

1. **Metal Roof Deck Panels*** — Minimum 0.0225 in. thick or 24 MSG coated steel. Max panel width 36 in.

MCELROY METAL MILL INC ([View Classification](#)) — "Multi-Rib"

TREMCO INC ([View Classification](#)) — "TremLock "R" Plus Panel"

2. **Fasteners** — Fasteners used to attach the plywood deck (Item 3) to the joists (Item 5) to be No. 8D ring shank nails spaced 6 in. OC at plywood edges and 6 in. OC in the field. Fasteners used to attach the panels to the plywood deck to be No. 14 by 1-1/2 in. long Type A hex head steel screws with 9/16 in. diameter metal washer and bonded neoprene rubber seal. Screws to be spaced 12 in. O.C. along the width of the panel and 24 in. O.C. along the length of the panel. The overlapping panel edges to be fastened together with No. 14 by 7/8 in. long hex head steel screws spaced 20 in. O.C. along the length of the panel.

3. **Deck** — Min 19/32 in. thick, Type B-C rated plywood, all butt joints to occur over supports.

4. **Underlayment (Optional)** — 30 lb felt, min 2 in. sidelap, attached per manufacturers recommendations.

5. **Joists** — Graded dimension lumber, No. 2 or better. Spaced a maximum of 24 in. OC.

Refer to general information, Roof Deck Construction, for Items not evaluated.

*Bearing the UL Classification Mark

Last Updated on 2013-04-08

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2013 UL LLC

When the UL Leaf Mark is on the product, or when the word "Environment" is included in the UL Mark, please search the [UL Environment database](#) for additional information regarding this product's certification.

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2013 UL LLC".